

PHD**D100A(K)1K6VB...SERIES****STANDARD RECOVERY DIODES****Stud Version****Features**


- Hermetic metal case with ceramic insulator
- High surge current capabilities
- Stud cathode and stud anode version

100A**Typical Applications**

- Converters
- Power supplies
- Machine tool controls
- High power drives
- Medium traction applications

Major Ratings and Characteristics

Parameters		D100A(K) 1K6VB	Units
$I_{F(AV)}$		100	A
	@ T_{hs}	160	°C
$I_{F(RMS)}$		240	A
I_{FSM}	@ 50Hz	2000	A
	@ 60Hz	2090	A
$I^2 t$	@ 50Hz	20000	A ² s
	@ 60Hz	18180	A ² s
V_{RRM} range		1600	V
T_J		- 40 to 180	°C

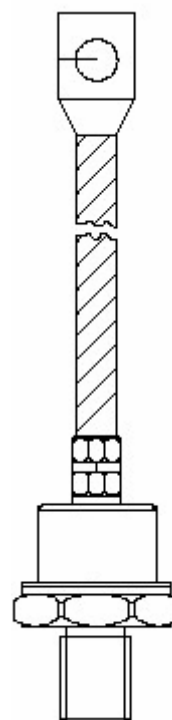

case style

PHD**D100A(K)1K6VB...SERIES****ELECTRICAL SPECIFICATIONS****Voltage Ratings**


D100A(K)	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non- repetitive peak rev. voltage V	I_{RRM} max. @ $T_J = T_J$ max. mA
	04	400	500	9
	08	800	900	
	12	1200	1300	
	14	1400	1500	
	18	1800	1900	

Forward Conduction

Parameter	D100A(K)	Units	Conditions
$I_{F(AV)}$ Max. average forward current @ Heatsink temperature	160	A	180° conduction, half sine wave
	140	°C	Double side (single side) cooled
$I_{F(RMS)}$ Max.RMS forward current	240	A	DC@110°C case temperature
I_{FSM} , Max. peak, one-cycle forward, non-repetitive surge current	2000	A	t = 10ms No voltage
	2090		t = 8.3ms reapplied
	1680		t = 10ms 100% V_{RRM}
	1760		t = 8.3ms reapplied
$I^2 t$ Maximum $I^2 t$ for fusing	20000	A ² s	t = 10ms No voltage
	18180		t = 8.3ms reapplied
	14100		t = 10ms 100% V_{RRM}
	12800		t = 8.3ms reapplied
$I^2 \sqrt{t}$ Maximum $I^2 \sqrt{t}$ for fusing	200000	A ² √s	t = 0.1 to 10ms, no voltage reapplied
V_{TM} Max. forward voltage drop	1.40	V	$I_{pk} = 267A$, $T_J = 25^\circ C$, $t_p = 400 \mu s$ rectangular wave
$V_{F(TO)}$ Low level value of threshold voltage	0.73	V	$(16.7\% \times \pi \times I_{F(AV)} < 1 < \pi \times I_{F(AV)})$, $T_J = T_J$ max
r_f Low level value of forward slope resistance	0.49	MΩ	$(16.7\% \times \pi \times I_{F(AV)} < 1 < \pi \times I_{F(AV)})$, $T_J = T_J$ max

Thermal and Mechanical Specification

Parameter	D100A(K)	Units	Conditions
T_J Max.junction operating temperature range	-55to 180	°C	
T_{stg} Max. storage temperature range	-55 to 180		
R_{thJC} Max,thermal resistance,junction to case	0.27	K/W	DC operation
R_{thCS} Max. thermal resistance,Case to heatsink	0.25		DC operation single(double) side cooled
T Max.allowed Mounting torque, ± 10%	7	N	
wt Approximate weight	150	g	

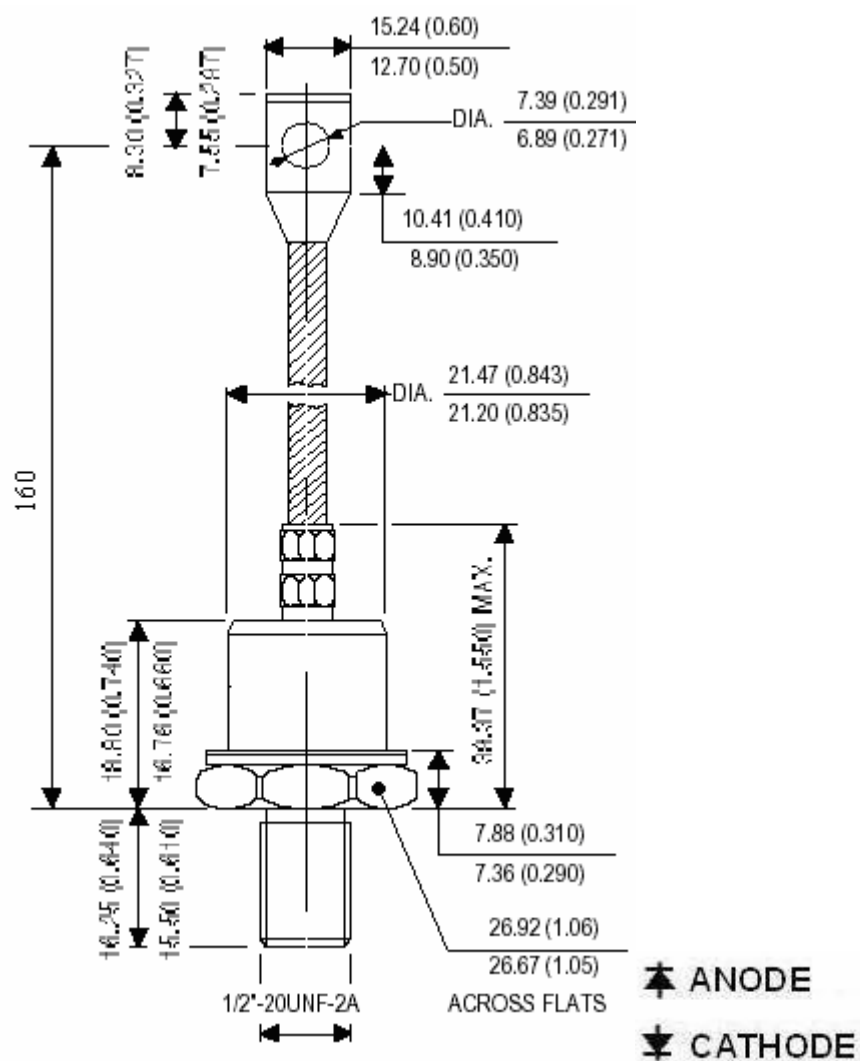

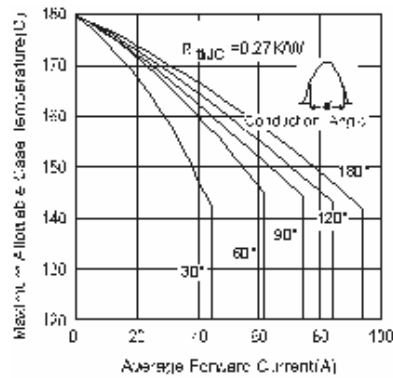


Fig.1-Current Ratings Characteristics

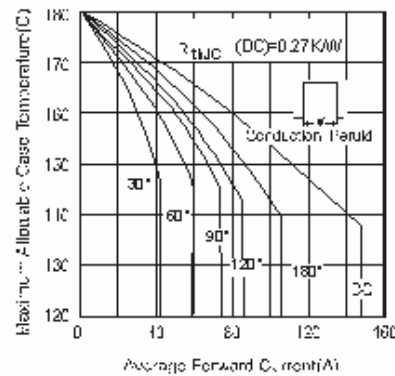


Fig.2-Current Ratings Characteristics

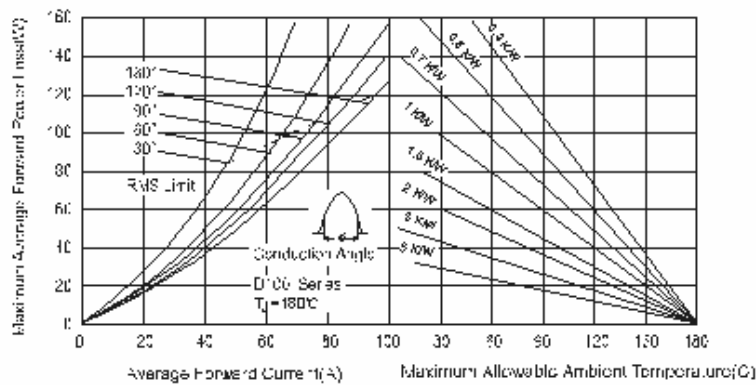


Fig.3-Forward Power Loss Characteristics

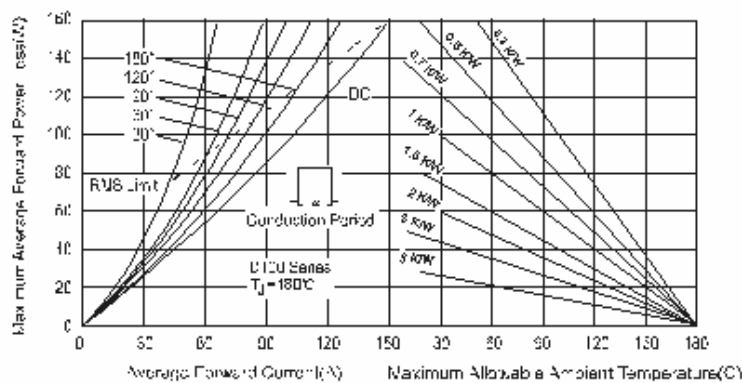


Fig.4-Forward Power Loss Characteristics